



Pin1 -- 棕色/+
Pin2 -- 空 /NC
Pin3 -- 蓝色/-

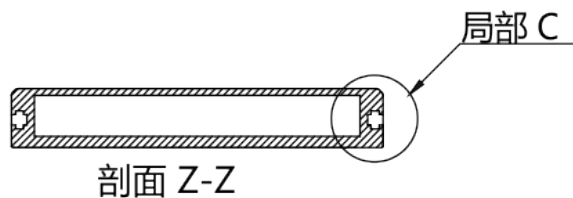

剖面 Z-Z

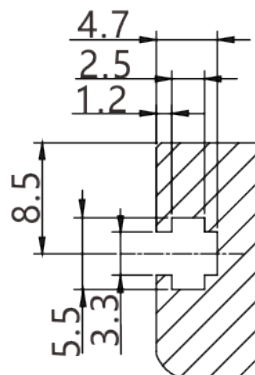

局部 C,
四面, M3螺母, 安装用

参数 型号	尺寸 (mm)						额定功率(w)		估重 (g)
	A	B	C	D	E	F	R	W/G/B	
ZR-BGP027X027R/W/B/G-G2	27	27	41	41	32	18	1.1	2.8	60
ZR-BGP043X035R/W/B/G-G2	43	35	57	49	40	18	1.9	2.8	85
ZR-BGP051X051R/W/B/G-G2	51	51	65	65	56	18	4.2	4.4	115
ZR-BGP063X060R/W/B/G-G2	63	60	77	74	65	25	4.1	5.1	150
ZR-BGP083X075R/W/B/G-G2	83	75	97	89	80	50	5.5	5.2	210
ZR-BGP100X100R/W/B/G-G2	100	100	114	114	105	50	9.5	10.0	285
ZR-BGP140X105R/W/B/G-G2	140	105	154	119	110	80	13.8	13.9	390
ZR-BGP160X120R/W/B/G-G2	160	120	174	134	125	80	16.6	17.4	460
ZR-BGP200X050R/W/B/G-G2	200	50	214	64	55	80	9.9	20.0	475
ZR-BGP200X150R/W/B/G-G2	200	150	214	164	155	80	28.8	30.2	600
ZR-BGP224X170R/W/B/G-G2	224	170	238	184	175	80	30.2	33.7	690
ZR-BGP211X200R/W/B/G-G2	211	200	225	214	205	80	24.2	24.2	890

请对照左边标示的标注符号

产品安装尺寸图					设计	修玉川		 致瑞图像 ZHIRUI VISION		
输入 电压	理论电耗功率				审核					
	红色 (R)	白/蓝/绿色 (WGB)	红外 (IR)	紫外 (UV)	估重	视角方向	比例	单位	型号	
24V								mm		